

FOR BUILDINGS AND HOMES

INSULATION

DATA SHEET

Spaceloft® is a flexible, nanoporous aerogel blanket insulation that reduces energy loss while conserving interior space in residential and commercial building applications.

Spaceloft®'s unique properties – extremely low thermal conductivity, superior flexibility, compression resistance, hydrophobicity, and ease of use – make it essential for those seeking the ultimate in thermal protection.

Using patented nanotechnology, Spaceloft® insulation combines a silica aerogel with reinforcing fibers to deliver industry-leading thermal performance in an easy-to-handle and environmentally safe product.

Spaceloft® is a proven, effective insulator in building applications, providing the highest R-value of any insulation material for maximum energy efficiency in walls, floors, roofs, framing, and windows.




Physical Properties

Thicknesses*	0.20 in (5 mm), 0.40 in (10 mm)
Max. Use Temp.	390°F (200°C)
Color	White
Density*	9.4 lb/ft ³ (0.15 g/cc)
Hydrophobic	Yes
Material Form*	57 in (1,450 mm) wide


* Nominal Values

R-Value Per Inch

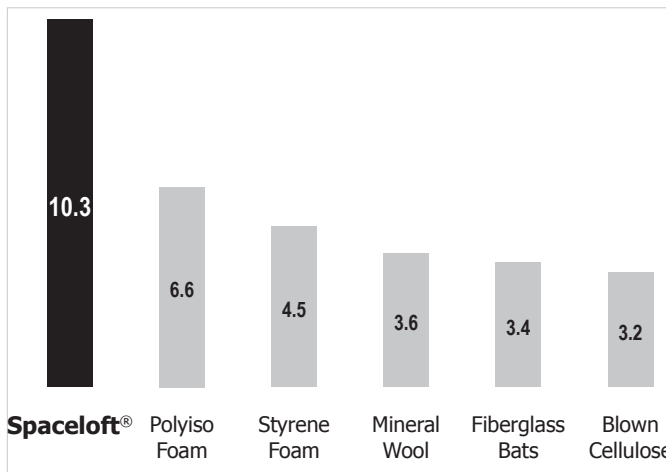

Thermal Conductivity

ASTM C 177 Results

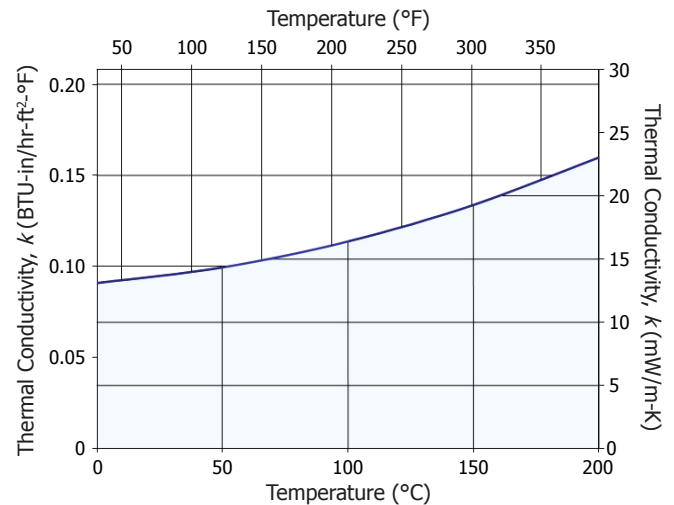

Mean Temp. °C	0	25	50	75	100	125	150	175	200
°F	32	77	122	167	212	257	302	347	392
k mW/m-K	13.1	13.6	14.3	15.3	16.4	17.7	19.3	21.0	23.0
BTU-in/hr-ft²-°F	0.091	0.094	0.099	0.106	0.114	0.123	0.134	0.146	0.160

Advantages

Superior Thermal Performance

Up to five times better thermal performance than competing insulation products

Reduced Thickness and Profile

Equal thermal resistance at a fraction of the thickness

Less Time and Labor to Install

Easily cut and conformed to complex shapes, tight curvatures, and spaces with restricted access

Physically Robust

Soft and flexible but with excellent springback, Spaceloft® recovers its thermal performance even after compression events as high as 50 psi

Shipping and Warehousing Savings

Reduced material volume, high packing density, and low scrap rates can reduce logistics costs by a factor of five or more compared to rigid, pre-formed insulations

Simplified Inventory

Unlike rigid pre-forms such as pipe cover or board, the same Spaceloft® blanket can be kitted to fit any shape or design

Hydrophobic Yet Breathable

Spaceloft® repels liquid water but allows vapor to pass through

Environmentally Safe

Landfill disposable, shot-free, with no respirable fiber content

Characteristics

Spaceloft® can be cut using conventional textile cutting tools including scissors, electric scissors, and razor knives. The material can be dusty, and it is recommended gloves, safety glasses, and dust mask be worn when handling material. See MSDS for complete health and safety information.

Other Available Materials

Aspen Aerogels® produces several series of flexible aerogel blanket materials for thermal insulation, energy absorption, and fire protection. Please contact Aspen Aerogels® for additional information on these products.

Information presented herein is typical and representative of material performance. Any and all warranties, either expressed or implied, are disclaimed. All products or materials supplied, including any recommendations or suggestions must be evaluated by the user to determine applicability and suitability for a particular use. Values should not be used directly for specification purposes. Aspen Aerogels, Inc. does not assume any liability for use or misuse of any products produced or supplied. This information replaces all previous information. As a result of the constant development of our products, we reserve the right to make alterations to this information without notice.